ANY DEVIATION FROM THESE PLANS REQUIRING ROCKWOOD DESIGN INC. TO ACQUIRE STRUCTURAL REDESIGN FOR BUILDING DEPARTMENT SIGN-OFFS WILL BE BILLED TO CLIENT ON AN HOURLY BASIS.

HIGHLAND ESTATES NORWELL LLC OFF CIRCUIT STREET LOT #5 NORWELL MA, 02061



LOCUS MAP



GENERAL NOTES:

- 1. GENERAL CONTRACTOR TO CONFORM TO ALL LOCAL AND STATE BUILDING CODE REQUIREMENTS.
- 2. GENERAL CONTRACTOR TO VERIFY ALL CONDITIONS AND DIMENSIONS SHOWN ON THE DRAWINGS AND NOTIFY THE ENGINEER OF ANY DISCREPANCIES.
- THE ENGINEER IS RESPONSIBLE ONLY FOR INFORMATION SHOWN ON THE CERTIFIED ENGINEER'S DRAWINGS. THE DESIGN AND LAYOUT OF ALL OTHER INFORMATION IS THE RESPONSIBILITY OF OTHERS AND MUST CONFORM TO THE MASSACHUSETTS BUILDING CODE REQUIREMENTS. REFER TO STRUCTURAL ENGINEERING BY OTHERS FOR CERTIFIED BEAM CALCULATIONS AND CERTIFIED WIND DESIGN DETAILS.
- ALL HEATING, PIPING, INSULATION, ELECTRICAL, FIREPROOFING AND OTHER REQUIREMENTS ARE THE 4. RESPONSIBILITIES OF OTHERS.
- NOTIFY THE ENGINEER OF ANY ARCHITECTURAL MODIFICATIONS OR DIMENSION CHANGES THAT MAY AFFECT 5. THE STRUCTURAL DESIGN.

STRUCTURAL STEEL NOTES:

QUANTITY ID LETTER MANUFACT

D

J

28

TOTAL 50

ANDERSEN

ANDERSEN

- ALL STEEL BEAMS SHALL BE NEW STEEL CONFORMING TO THE ALS.C. SPECIFICATIONS FOR DESIGN 1 PARTICULAR AND ERECTION OF STRUCTURAL STELL FOR BUILDINGS AND AS.T.M. - GRADE 50. ALL CAP AND BASE PLATES AND OTHER MISCELLANEOUS STELL MAY BE A.S.T.M. GRADE A36.
- ALL SCHEDULE 40 PIPE SHALL BE NEW STEEL CONFORMING TO THE ALS.C. SPECIFICATIONS FOR DESIGN, FABRICATION AND ERECTION OF STRUCTURAL STEEL FOR BUILDINGS AND A.S.T.M. SPECIFICATION A53, TYPE "E" OR "S", GRADE "B", WITH A MINIMUM YIELD STRESS OF 35 K.S.L. 2.
- ALL SHOP AND FIELD WELDS SHOWN SHALL BE MADE BY APPROVED CERTIFIED WELDERS AND SHALL CONFORM TO THE AW.S. CODE FOR BUILDINGS. ALL WELDS SHALL DEVELOP THE FULL STRENGTH OF THE З. MATERIAL BEING WELDED. USE EXX 10 ELECTRODES.
- NO PERMANENT CONNECTIONS SHOULD BE MADE UP UNTIL THE STRUCTURE HAS BEEN PROPERLY ALIGNED. PROVIDE TEMPORARY BRACING AS REQUIRED.
- STEEL FABRICATOR 15 RESPONSIBLE FOR FINAL LENGTHS, CONNECTION DETAILS AND DESIGN IN ACCORDANCE WITH THE MINMUM REQUREMENTS OF THE LATEST EDITION OF THE A.I.S.C. DETAILING MANUAL 5. SUBMIT SHOP DRAWINGS WITH ALL DETAILS TO THE GENERAL CONTRACTOR PRIOR TO FABRICATION.
- USE 1/2" MINIMUM CAP PLATE AND BASE PLATES (6×6 MINIMUM) FULLY WELDED ALL AROUND AT COLUMNS WITH 6. 3/16" FILLET WELD, OR AS OTHERWISE SPECIFIED ON THE DRAWINGS. ALL STEEL COLUMN EXTERIOR BASE PLATE SHALL BE BOLTED TO THE CONCRETE FOUNDATIONS WITH 4-5/8" DIAMETER ANCHOR BOLTS.
- ALL STEEL SHALL HAVE TWO COATS OF RUST-INHIBITOR PRIMER PAINT. TOUCH UP ALL WELDS, SCRATCHES OR SCRAPES IN PAINT AFTER ERECTION.
- STEEL BEAM MAY BE SPLICED AT STEEL COLUMN CAP PLATE WITH A MAXIMUM GAP BETWEEN BEAMS OF 8. 1/4". USE 1/4" TIE PLATE WELDED TO WEBS.

MODEL

TW 26410

TW 2636

C 235 TW 2646

TW 2646-3

ANDERSEN TW 1846/TW 2446/TW 1846 ANDERSEN A 281

FRAME JOSTS TO TOP OF BEAM ON A 2X8 TOP NAILER THRU-BOLTED WITH 1/2" DIAMETER BOLTS STAGGERED AT 24" O.C., JOISTS TO BE ANCHORED TO THE TOP NAILER WITH SIPMSON HA HURRICANE CLIPS. FLUGH FRAME JOSTS TO THE FULL DEPTH WEB BLOCKING FASTERED TO THE BEAM WITH 1/2" DIAMETER THRU-BOLTS AT 24" O.C. STAGGERED TOP AND BOTTOM.

(WINDOWS SHOWN FOR ESTIMATING AND PERMITTING ONLY FINAL ORDER TO BE VERIFIED AND APPROVED BY OWNER) WINDOW SCHEDULE

TYPE

MULLED DOUBLE HUNG

AWNING

DOUBLE HUNG

 DOUBLE HUNG
 2'-8 1/8" W × 5'-Ø 7/8" H

 DOUBLE HUNG
 2'-8 1/8" W × 3'-8 7/8"

 CASEMENT
 4'-0 1/2"
 W × 3'-5 3/8"
 H

 DOUBLE HUNG
 2'-8 1/8"
 W × 4'-8 7/8"
 H

 LED DOUBLE HUNG
 SEE SUPPLIER

G SEE SUPPLIER 2'-8" ₩ × 2'-0 5/8" H

SEE SUPPLIER

ROUGH OPENING COMMENTS

- ALL FRAMING OTHERWISE SF ASSOCIATION COMPRESSION BE 1,400,00 ONLY UPON A
- ALL PRESSUR 2 GRADE NO. 2 ELASTICITY (E)
- 3. ALL LVLS TO E ALLOWABLE B (FC) PERPEND ELASTICITY (E) TREATED (CC. INSTRUCTIONS. MODULUS OF
- USE 3/4" TONG 4 STRUCTURAL (C.D.X.) AT WA
- ALL EXTERIOR 5
- PROVIDE ADE PLATES.
- ٦. PROVIDE SOLI
- 8. USE FULLY NAI JOISTS OR BE POSTS.
- FOR NONBEAR HEADER BEAN 9. HEADER BEAT PLANS OR SF PROVIDE DOU
- 10. ALL FRAMING AND GENERAL \$ SLEEPER
- ALL PLYWOOD 11. AMERICAN PL SUBFLOOR CO
- ALL WALL STUD 12.
- THE CROSS WA 13. SHOULD BE SE
- BUILT-UP BEA 14. TOGETHER WI OTHERWISE NO
- 15. ALL NAILS, FAS
- 16. ALL LUMBER

					REQU	DEVIATION FROM THESE PLANS IRING ROCKWOOD DESIGN INC.	SEE SHEET AI FOR DRAWING INDEX	:			
					BUILD	CQUIRE STRUCTURAL REDESIGN FOR ING DEPARTMENT SIGN-OFFS WILL BE D TO CLIENT ON AN HOURLY BASIS.	IF PRINTED ON 11×11, ALL SCALE IS	HALF.	NOL		
							PLEASE REFER TO ENGINEERING P FOR ALL STRUCTURAL DETAILS	ACKET	DE9CRIP		
FRA	MING NOTES:	<u>"</u>									
1.	OTHERWISE SP ASSOCIATION.	LUMBER SHALL BE S.P.F. (SPRUCE-PINE-FIR) GRADE NI/N "ECIRED) AND SHALL MEET THE REQUIREMENTS OF THE AN THE MINIMUM ALLOWABLE BENDING STRESS (FB) SHALL BI 1 STRESS (FC) SHALL BE 425 P.S.I. THE MINIMUM ALLOWAB	1ERICAN FOREST AND PAPER E 815 P.S.I. THE MINIMUM ALLOWABLE	1. SPF		SHALL BEAR LEVEL ON UNDISTURBED SOIL HAVING A	IN ALLOWABLE BEARING CAPACITY OF		DATE	++-	$\left \right $
	BE 1,400,000	9 P.S.I. OTHER FRAMING MATERIAL FOR INTERIOR NON-LC PPROVAL OF THE ENGINEER.		ENC	COUNTERED AT	IALS WITH A LOWER BEARING CAPACITY THAN TWO TO THE SPECIFIED ELEVATIONS, THE UNDERLYING UNSUITA TH SUITABLE MATERIAL TO BE APPROVED BY THE EN	BLE MATERIAL SHALL BE REMOVED				
2.	GRADE NO. 2 ALLOWABLE CO	E TREATED (CCA TREATED) DIMENSIONAL FRAMING LUMBI THE MINIMUM ALLOWABLE BENDING STRESS (FB) SHALL B OMPRESSION STRESS (FC) SHALL BE 565 P.S.I. THE MINIML	E 1,050 P.S.I. THE MINIMUM			JMES NO RESPONSIBILITY FOR THE VALIDITY OF SUBSI	URFACE CONDITIONS.				
_) SHALL BE 1,600,000 P.S.I.		5. FOC	OTINGS SHALL B	E PROTECTED AGAINGT FROST UNTIL PROJECT IS CON	1PLETED.				
3.	ALL LVL9 TO BE MANUFACTURED BY TRUS JOST, GEORGIA PACIFIC OR APPROVED EQUAL THE MINIMUM ALLOWABLE BENDING STRESS (FB) SHALL BE 2,900 P.SI. THE MINIMUM ALLOWABLE COMPRESSION STRESS (FC) PERPENDICULAR TO THE GRAIN SHALL BE T50 P.SI. THE MINIMUM ALLOWABLE MODULUS OF ELASTICITY (E) SHALL BE 2,000,000 P.SI. ALL PARALAMS EXPOSED TO THE WEATHER SHALL BE PRESSURE				INT PORTION OF THE FOOTINGS AND SLABS SHALL BE VEL AS APPROVED BY THE ENGINEER.	COMPACTED IN 6" LIFTS OF 35%					
	TREATED (CCA	SHALL DE 2000,000 F.S.I. ALL FARALATIS EAF ODD T A TREATED.) INSTALL MICROLAMS AND PARALAMS IN AC PARALLAM (LAM) POSTS SHALL HAVE AN ALLOWABLE CI ELASTICITY OF 2,000,000 P.S.I.	CORDANCE WITH THE MANUFACTURER'S	CO		HALL CONFORM TO THE LATEST AMERICAN CONCRET TS FOR REINFORCED CONCRETE" AND "SPECIFICATIO					
4.	STRUCTURAL C	HE AND GROVE STRUCTURAL GRADE HT PLYWOOD FLOO GRADE HR (C.D.X.) PLYWOOD ROOF SHEATHING AND 1/2" ILLE. ALL JOINTS SHALL BE BLOCKED WITH LIMBER OR O'	EXTERIOR STRUCTURAL GRADE FIR	P.S ENT PRO	3.1. AT 28 DAYS A	NTON WALLS AND FOOTINGS SHALL HAVE A MINIMUM C NID 3,500 P.S.I. FOR SLABS, WITH A SLUMP OF NO MC 68. THE USE OF CALCIUM CHLORIDE IS NOT PERMIT REAT IN COLD WEATHER AND MAINTAIN PROPER CURIL	DRE THEN 4" AND AIR TED. PROVIDE PROPER CONCRETE				
5.		2 AND INTERIOR STUD WALLS TO BE 2X4 MINIMUM @ 16" O.C				IENT SHALL CONFORM TO A.S.T.M. 615, GRADE 60.				5	
6. 1.	PLATES.	GUATE WALL RESISTANCE TO RAKING BY DIAGONAL COR		1 <i>0</i> . ALL	L CONCRETE SLA	ABS ON THE GROUND SHALL BE REINFORCED WITH 6X T MID-DEPTH, OR AS OTHERWISE SHOWN ON THE DRA				EGEND	
8.	USE FULLY NAIL	ID BLOCHING DETINEEN FLOOR JUBTS AND/OR DOUBLE AT LED METAL CONNECTORS (TECO, SIMPSON OR EQUAL), JO AMS FRAME INTO OTHER JOSTS OR BEAMS. PROVIDE ME	ST OR BEAM HANGERS WHEN	IS L		HALL CONFORM TO A.S.T.M. A185, AND SHALL LAP 6" 1 HALL BE WIRED TOGETHER. PROVIDE SUFFICIENT CHAI ID WIRE FABRIC.					
9.	POSTS. FOR NONBEAR	RING ROUGH WINDOW OPENINGS AND INTERIOR DOOR OPE	NINGS UP TO 3 FEET, USE 2-2×6	LAF		BARS ARE CALLED FOR THEY SHALL BE RUN CONTIN SARY SPLICES OR HOOKED AT DISCONTINUOUS ENDS.			ļ	ц Э	
	HEADER BEAM Plans <i>o</i> r spe	MS. FROM 3 FEET TO 5 FEET, USE 2-2X8 HEADER BEAMS. MS AND USE LVLS FOR SPANS EXCEEDING 1 FEET, EXCEP ECIFICATIONS. USE TRIPLES FOR 2X6 WALLS. IF LVLS ARE 3 IBLE JACK STUD SUPPORTS OR AS OTHERWISE SPECIFIED	T AS NOTED OTHERWISE ON THE BPECIFIED ON THE PLANS,	12. NOT	TIFY BUILDING D	EPARTMENT FOR INSPECTION OF COMPLETED INSTALL D SCHEDULED PLACEMENT OF CONCRETE.	ATION OF REINFORCEMENT AT LEAST			LON N	
1 0 .	ALL FRAMING	TO BE INSTALLED IN ACCORDANCE WITH THE MASSACHUS - FRAMING PRACTICE AS DETAILED IN THE "ARCHITECTUR	ETTS BUILDING CODE REQUIREMENTS			NCRETE POURS FOR FOUNDATION WALLS SHOULD HAV RCING (40 BAR DIAMETER MINIMUM) THRU THE CONS					
11.	\$ SLEEPER. ALL PLYWOOD	PFLOOR SHEATHING SHALL BE GLUED TO SUPPORTING WO	OD FRAMING MEMBERS USING	THE	14. ALL REINFORCING BARS SHALL BE COLD BENT IN ACCORDANCE TO THE PROPER RADII ESTABLISHED BY THE AMERICAN CONCRETE INSTITUTE, UNDER NO CONDITIONS SHALL HEAT BE APPLIED TO THE BARS TO OBTAIN BENDS.						
	SUBFLOOR CO	YWOOD ASSOCIATION (A.P.A.) GLUED FLOOR SYSTEM. WOO INSTRUCTION ADHESIVE, OR APPROVED EQUAL	D GLUE TO BE CONTECH, INC. PL400	15. THE		OL JOINTS IN THE SLAB IS RECOMMENDED TO CONTRO ICH NOT-TO-EXCEED 10 FEET BY 10 FEET.	DL CRACKING. SAW CUT TO A			U	
		DS TO ALIGN WITH FLOOR JOISTS AND ROOF RAFTERS.				FOUNDATION WALLS BELOW GRADE, OTHER THAN FRO	DOT WALLO.			Ĕ	
13.	SHOULD BE SE	ALLS AND TIE BEAMS ARE TO PROVIDE THE LATERAL RES ECURELY ATTACHED AT EACH END AND/OR TO THE EXTER	RIOR WALLS.						ļ	лЕЦ #5	
14.	TOGETHER WIT	M9 (3 PIECES MAXIMUM) USING CONVENTIONAL FRAMING LI 14 2-10D NAILS AT 8" O.C. AND LVLS WITH 2-16D NAILS (TO DTED ON THE DRAWINGS, OR AS RECOMMENDED BY THE 1	P AND BOTTOM) AT 8" O.C., OR AS							LoT #	<u>.</u>
15.	ALL NAILS, FAS	STENERS AND CONCRETE EXPOSED TO THE WEATHER SHA	ALL BE HOT-DIP GALVANIZED						Î	Щ.	5
16.	ALL LUMBER T	HAT COMES IN CONTACT WITH CONCRETE SHALL BE PRES	SOURE TREATED.					Ś		STAI STR	Ø ri
	ENTS	FLOOR PLAN LEGEND:	FOUNDATION NOTES/LEGEND:			FRAMING NOTES/LEGEND:		6	1		Ľ, ΜΔ
			1) SEE "STRUCTURAL ENGINEERING AND WF BOOKLET NO. 20 BY ENGIN	EERING, LLC		SEE "STRUCTURAL ENGINEERING AND WFCM , BOOKLET NO. 20 BY EN DATED SEP!!2021 FOR ADDITIONAL NOTES	IGINEERING, LLC	126	≓ ≤		RUEL
			DATED SEP/_/2021 FOR ADDITIONAL NO 2) ALL NEW FOUNDATION WALLS SHALL BE I WITH A BITUMINOUS COATING.			2) ALL FRAMING MEMBERS SHALL BE FASTENE RECOMMENDATIONS AND THE COMMONWEAL		Ľ	AR .	т Б П П П	<u>Š</u>
			 6 9Q. FT. OF VENTILATION REQUIRED FOR 1,500 9Q. FT. OF BASEMENT AREA. 	R EVERY			METAL HANGERS	7		te 320	140 In.com gn.com
		OBJECT BELOW	4) OPENING FOR UNDER-FLOOR VENTILATIC I SQ. FT, OPENING/I50 SQ. FT. OF CRAWL				STEEL BEAM		N N N		MA (41) -837-31 wooddesi wooddesi wooddesi
		PROPOSED SQUARE FOOTAGE NOTE:		WALL			LVL BEAM	Щ	ockwood	SIGN Street	ramieru le: (781)- chil@rock www.roci
		BASEMENT LIVING AREA = 1,536 FT ² FIRST FLOOR LIVING AREA = 1,830 FT ² SECOND FLOOR LIVING AREA = 1,833 FT ²	DENOTES EXISTING			b F COS	BEARING WALL	S	۳¢۱		Email: 1 Website:
		ATTIC FLOOR LIVING AREA = 661 FT ² TOTAL FINISHED LIVING AREA: = 5,926 FT ²				POST SIZE	FRAMING BELOW	₹ ₹	G		
							EXISTING FRAMING				
OMM	ENTS				ATOP	1913		μ	DATE: 2/1/202 DRAWN	-	
			A DENOTES ARCHITECTUR	RAL BUILDING SE	ECTION	KING STUDS	SMOKE/CO2	₩]	ST CHECK SCALE: AS SHO		
			2 DENOTES DETALL IN "ST BOOKLET BY STRUCTU		MENT9"	POST UP: SEE FRAMING PLAN OF FLOOR ABOVE FOR TYPE AND SIZE	HEAT SMOKE	A N H		Λ	1
	RTY OF ROCKWOOD	DESIGN, INC. NO PART THEREOF SHALL BE COPIED, DISCLOSED TO OTHERS,	CR USED IN CONNECTION WITH ANY WORK OR PROJECT, OTHER	THAN THE SPECIFIED	D PROJECT FOR WHICH	I THEY HAVE BEEN PREPARED AND DEVELOPED, WITHOUT THE EXPRE	555 KNOWLEDGE AND WRITTEN CONSENT OF ROCKWOOD DESIGN, IN				ч 47

EXTERIOR DOOR SCHEDULE									
QUANTITY	ID LETTER	MANUFACT.	MODEL	TYPE	ROUGH OPENING	COMMENTS			
1		BY OWNER	3'-Ø"×1'-Ø"	HINGED INSWING	SEE SUPPLIER				
3	2	BY OWNER	9'-@"x8'-@" 2'-8"x1'-@" W/ 1@" SD LTS	GARAGE DOOR	SEE SUPPLIER				
1	3	BY OWNER	2'-8"X1'-0" W/ 10" SD LTS	HINGED INSWING	SEE SUPPLIER				
3	4	ANDERSEN	FWG 60611	GLIDING PATIO DOOR	6'-0" W X 6'-11" H				
TOTAL									
8									

OPYPIGUT	(C) 2021 BY ROCKILLOOD DEGICAL INC.	THE ARCHITECTURAL PLANC	DRAWINGS DESIGNS SPECIFICATIONS AND OT	IED ADD ANGEMENTS ON THIS SHEET ADE AN	ID ALLALL REMAIN THE PROPERTY OF ROCKILLOOD DEAL	N INC NO BART THEREOF SHALL BE CORIED DISCLOSED TO OTH	ERS, OR USED IN CONNECTION WITH ANY WORK OR PROJECT, OTHER TH	AN THE ARECIDED REOLECT FOR HUNCH THEY HAVE BEEN	PREPARED AND DEVE

₀⊧**А**٦






19E PLANS ESIGN INC. REDESIGN FOR GN-OFFS WILL BE HOURLY BASIS.	SEE SHEET AI FOR DRAWING INDEX IF PRINTED ON 11X11, ALL SCALE IS HAL PLEASE REFER TO ENGINEERING PACK FOR ALL STRUCTURAL DETAILS		REVISION DATE DESCRIPTION
			TILE EXTERIOR ELEVATIONS
FLOOR & D. JOIST \$		2/1/2 <i>0</i> 23	FROJECT HIGHLAND ESTATES NORWELL LLC OFF CIRCUIT STREET LOT #5 NORWELL, MA. 02061
	58 KNOWLEDGE AND WRITTEN CONSENT OF ROCKWOOD DESIGN, INC.	FINAL PERMIT SET - 2/1/2023	







ANY DEVIATION FROM REQUIRING REOKUDUD TO ACQUIRE STRUCTUR BULLED TO CLENT ON A BILLED TO CLENT ON A	D DEGIGN INC. RAL REDEGIGN FOR T GIGN-OFFG WILL BE	REVISION DATE DESCRIPTION
		PINAL PERAIL SET - 2/1/2023 Image: State of the st

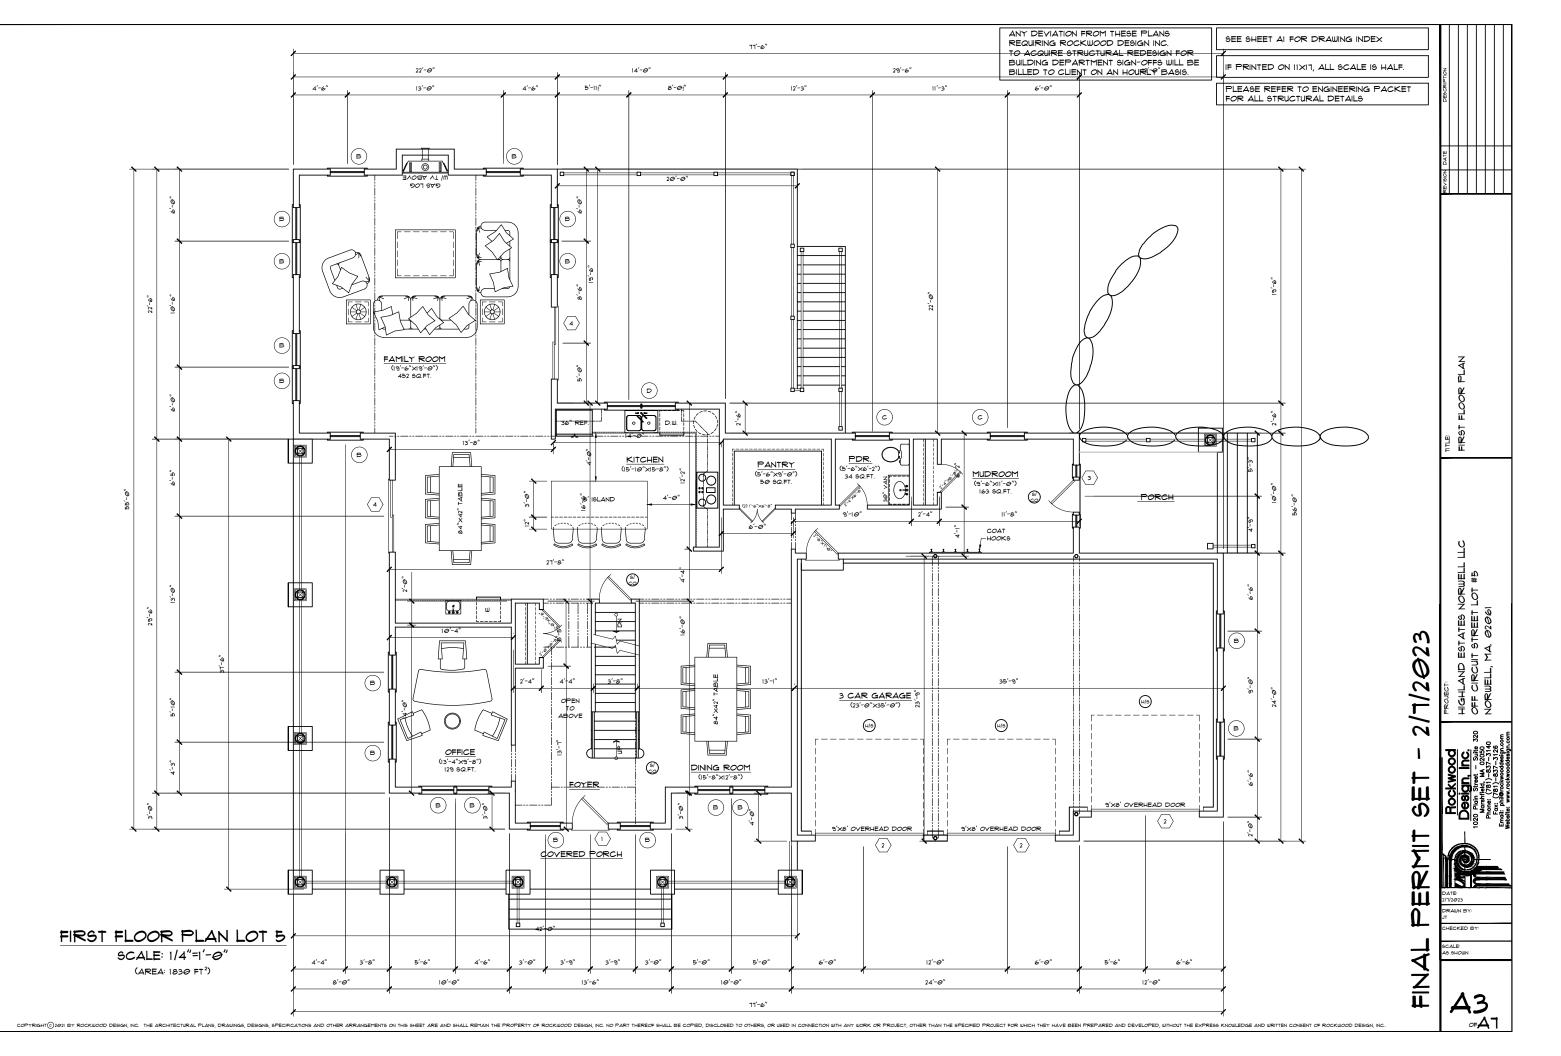


ANY DEVIATION FROM THES REQUIRING ROCKWOOD DE TO ACQUIRE STRUCTURAL BUILDING DEPARTMENT SIG BILLED TO CLIENT ON AN H

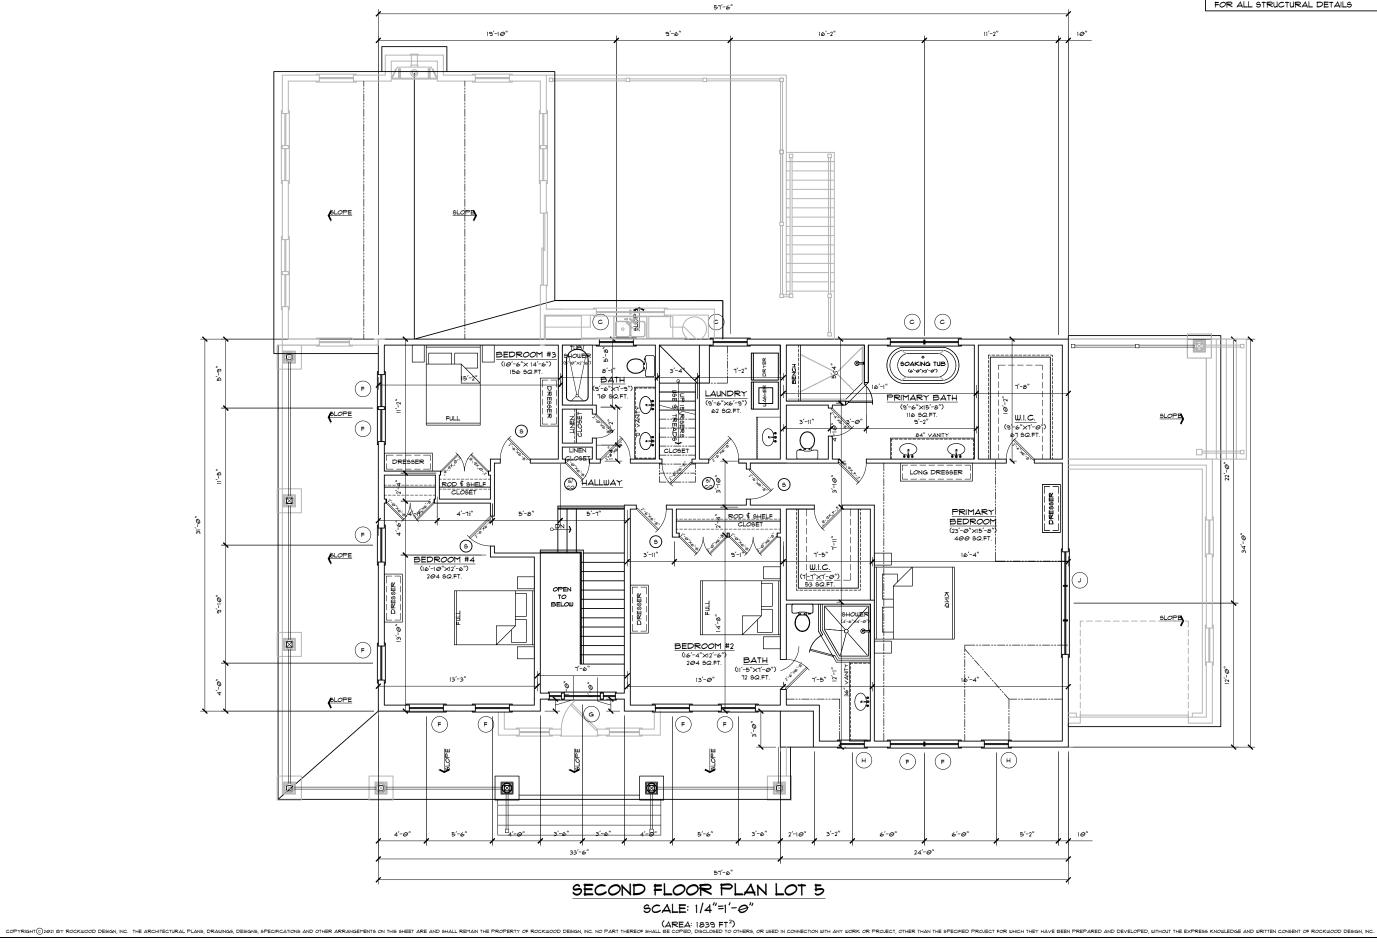


ESE PLANS DEGIGN INC. . REDESIGN FOR IGN-OFFS WILL BE HOURLY BASIS.	SEE SHEET AI FOR DRAWING INDEX IF PRINTED ON 11×11, ALL SCALE IS HALF. PLEASE REFER TO ENGINEERING PACKET FOR ALL STRUCTURAL DETAILS	REVISION DATE DESCRIPTION
		TITE SECOND FLOOR PLAN
9LOPB	1/2 <i>@</i> 23	FROJECT: HIGHLAND ESTATES NORWELL LLC OFF CIRCUIT STREET LOT #5 NORWELL, MA. 02061
	FINAL PERMIT SET - 2/1/2023	Part Carlos Participada Carlos

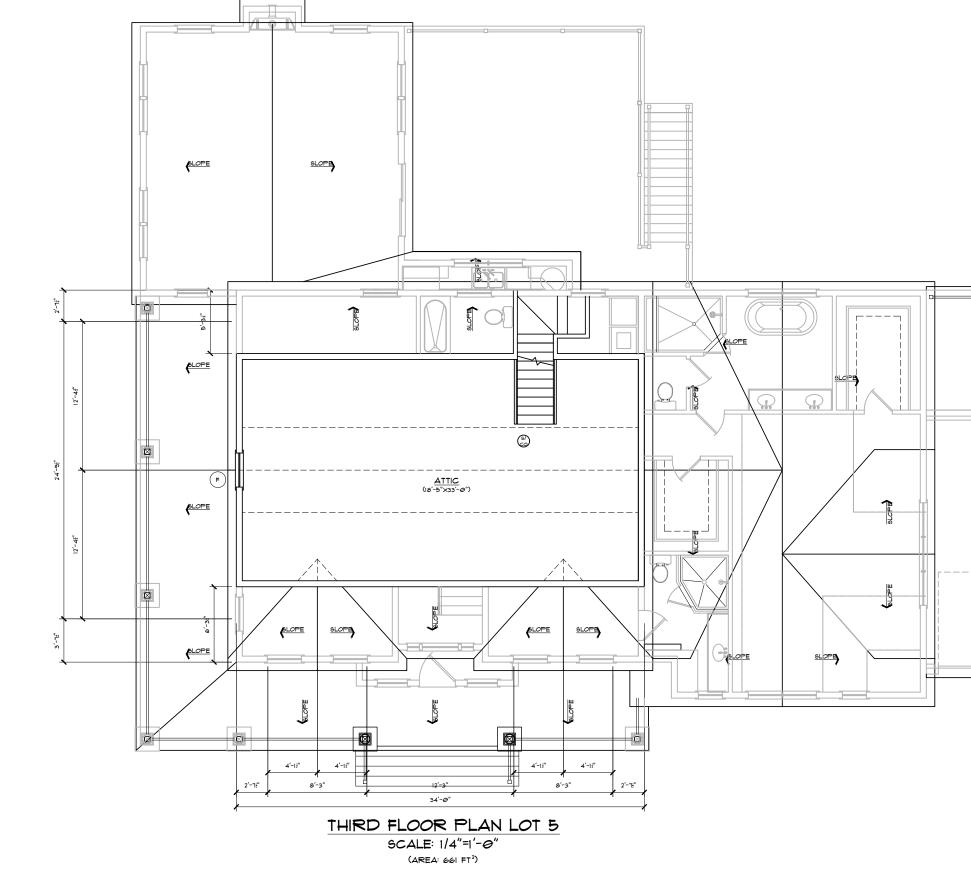


ANY DEVIATION FROM THESE PLANS REQUIRING ROCKWOOD DESIGN INC. TO ACQUIRE SCHWOOT URAL RODESIGN FOR BUILDING DEPARTMENT SIGN-OFFS WILL BE		
BILLED TO CLIENT ON AN HOURLY BASIS.		
FOR ALL STRUCTURAL DETAILS		
	ш	
	MBON DAT	
	<u>2</u>	
		PLAN
	ł	800 1
	E C	
	F	<u>`</u>
		0
	-	#8 #
	- m l ÷	TATE9 5TREE1 . 0206
	1/1/2 <i>0</i> 2:	ND E9 RCUIT 6 LL, MA
	1/2 PROJECT	
	5	320 230 230 230
		, IDC. et - Suite MA 02050 837314 8373126 8373126 wooddesign. wooddesign.
	Э Поск V	Besign Plain Stre- darshfield, one: (781)- ax: (781)- ex: (781)- exw.rock
	⊢ I `	
	$\overline{\Sigma}$	
$2^{'}-1^{''}$ $8^{'-3^{''}}$ $12^{'-3^{''}}$ $8^{'-3^{''}}$ $2^{'}-1^{''}$		CED BY:
THIRD FLOOR PLAN LOT 5 SCALE: 1/4"=1'-0"		e OWN
SCALE: 1/4"=1'-0" (AREA: 661 FT ²)	Ž∎ ∡	45 ∞-A1
		⊳⊧A 1

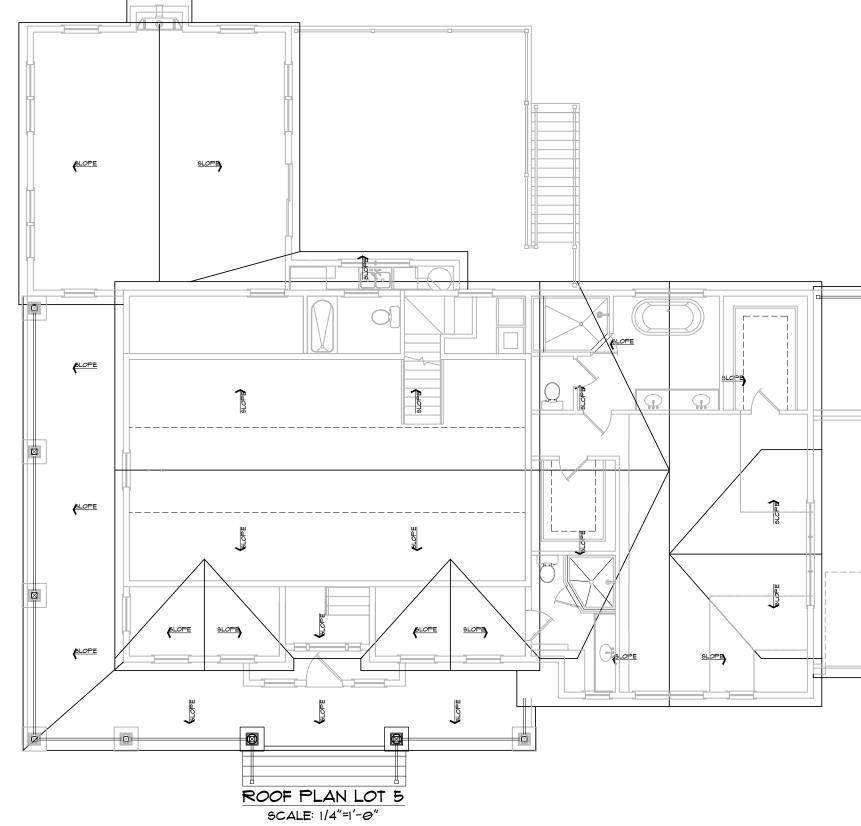



ESE PLANS DESIGN INC. _ REDESIGN FOR IGN-OFFS WILL BE HOURLY BASIS.	SEE SHEET AI FOR DRAWING INDEX IF PRINTED ON 11X17, ALL SCALE IS HALF. PLEASE REFER TO ENGINEERING PACKET FOR ALL STRUCTURAL DETAILS	REVISION DATE DESCRIPTION
		TTLE: ROOF PLAN
		PROJECT: HIGHLAND ESTATES NORWELL LLC HIGHLAND ESTATES NORWELL LLC DFF CIRCUIT STREET LOT #5 NORWELL, MA. 02061
	FINAL PERMIT SCHEME & MORE TO A COMPACE AND MALINE COMPACE AND	

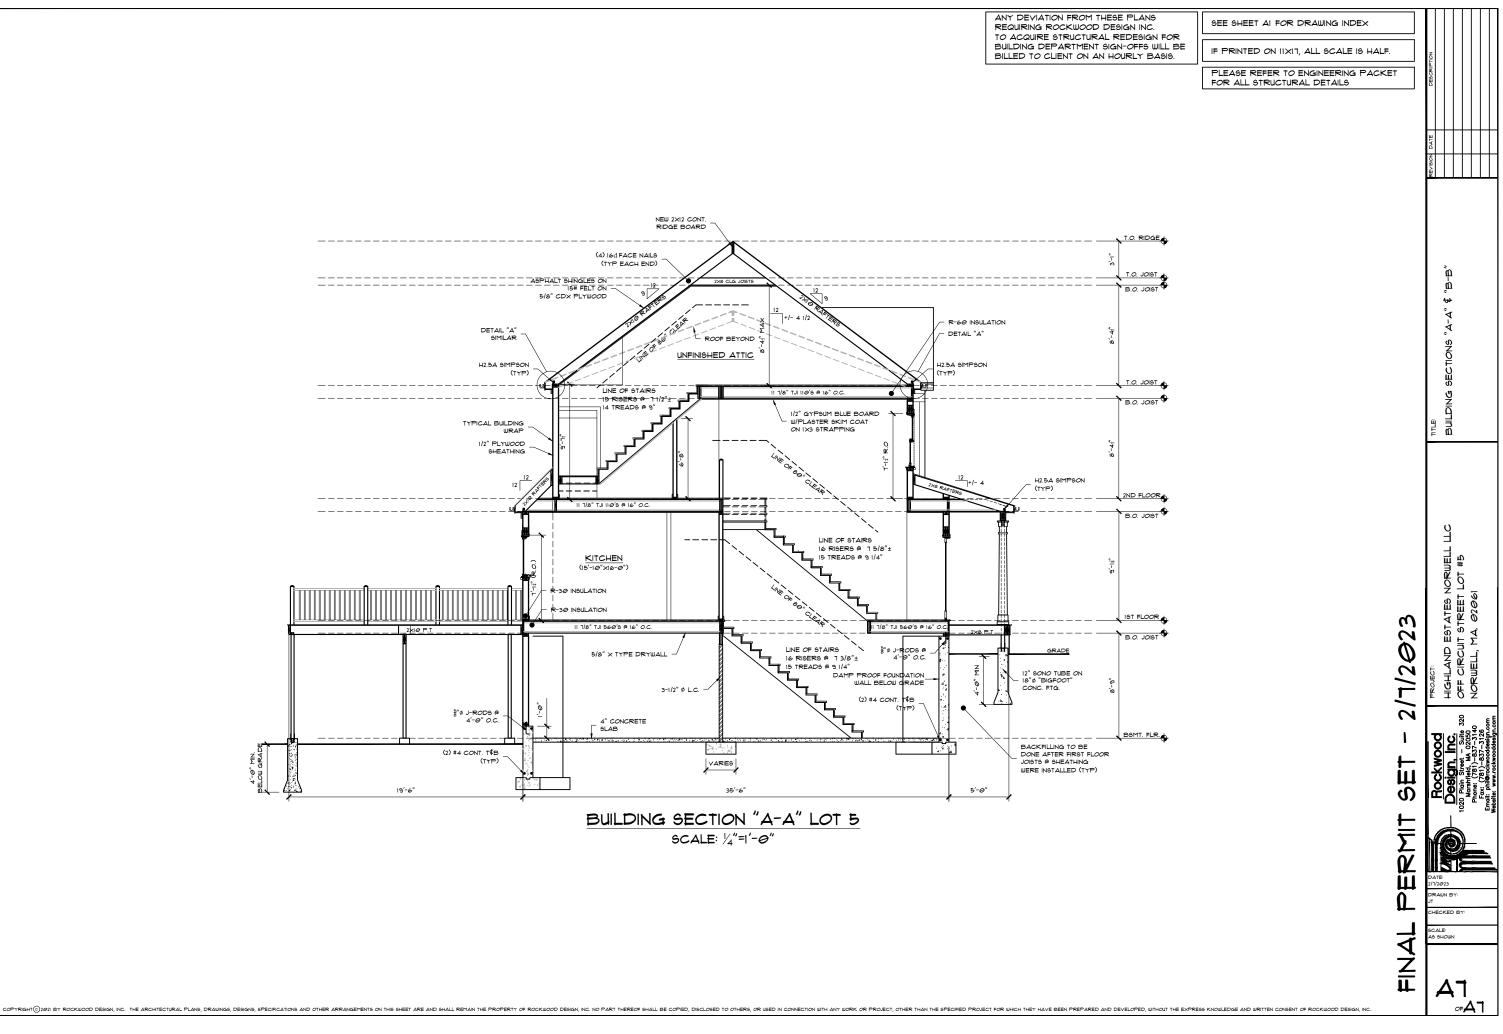


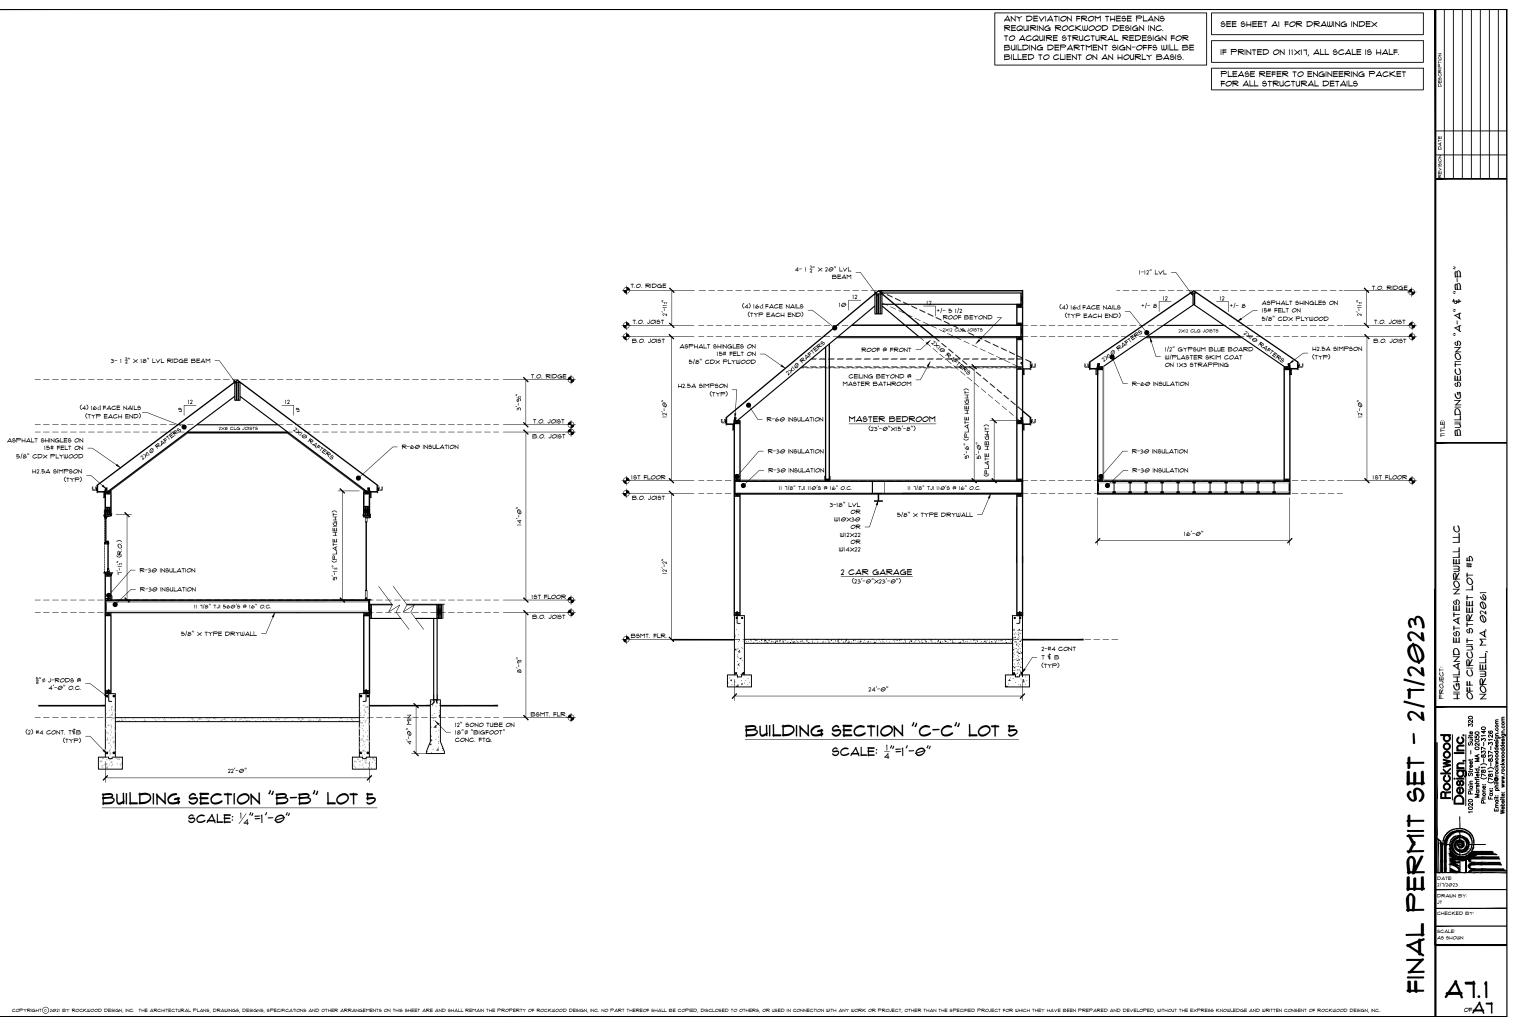




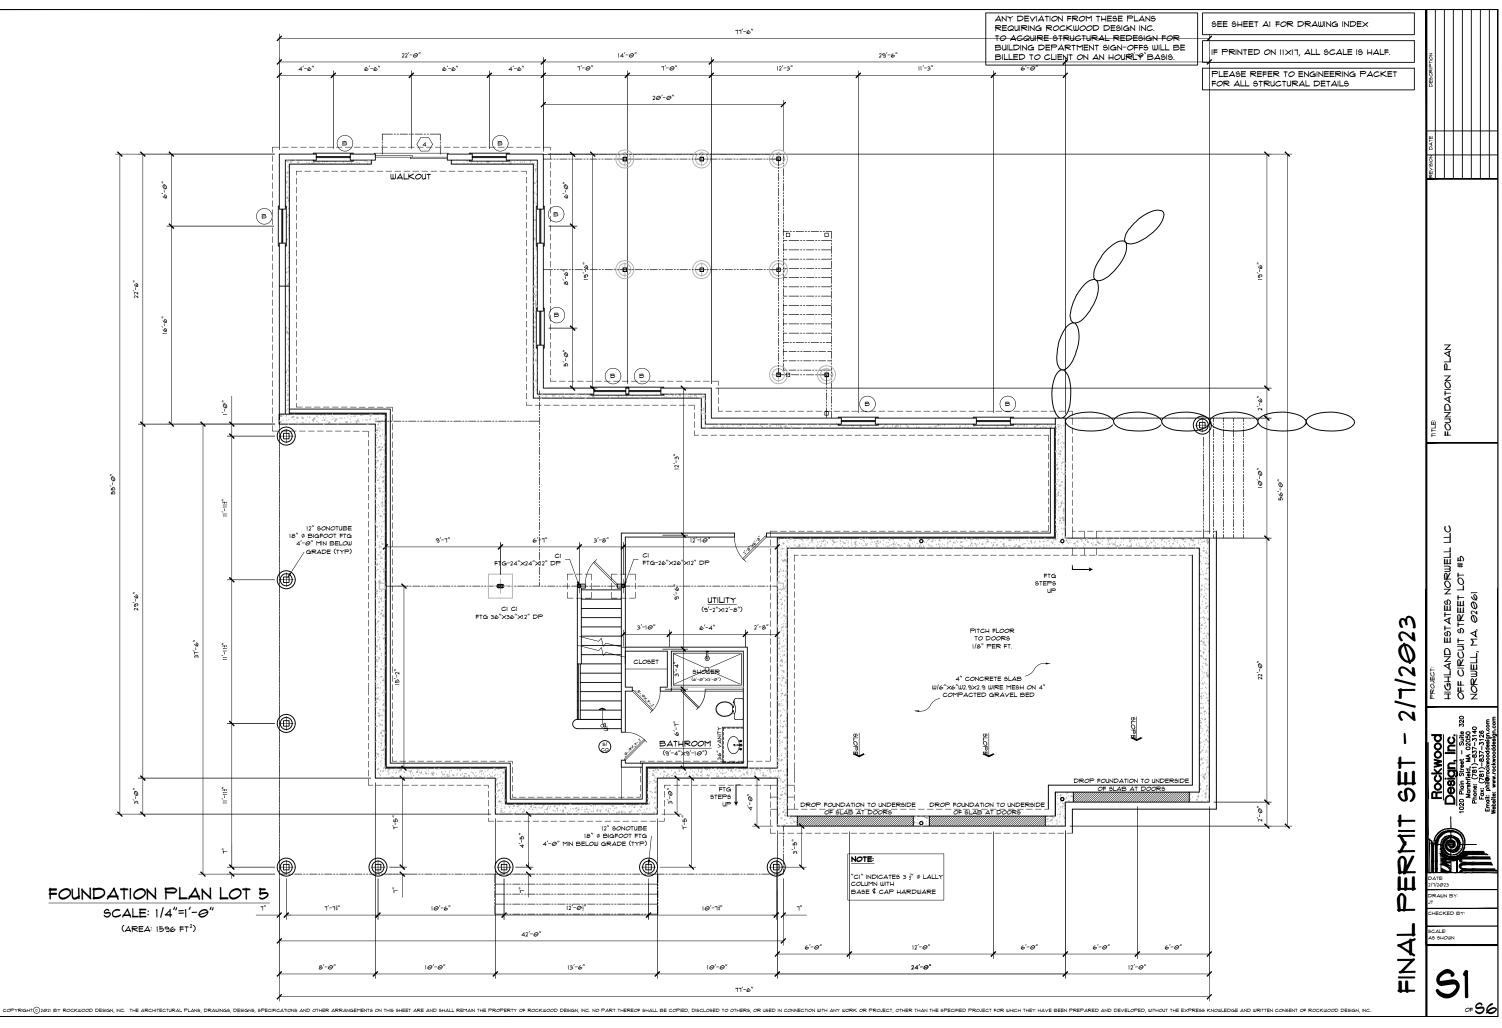

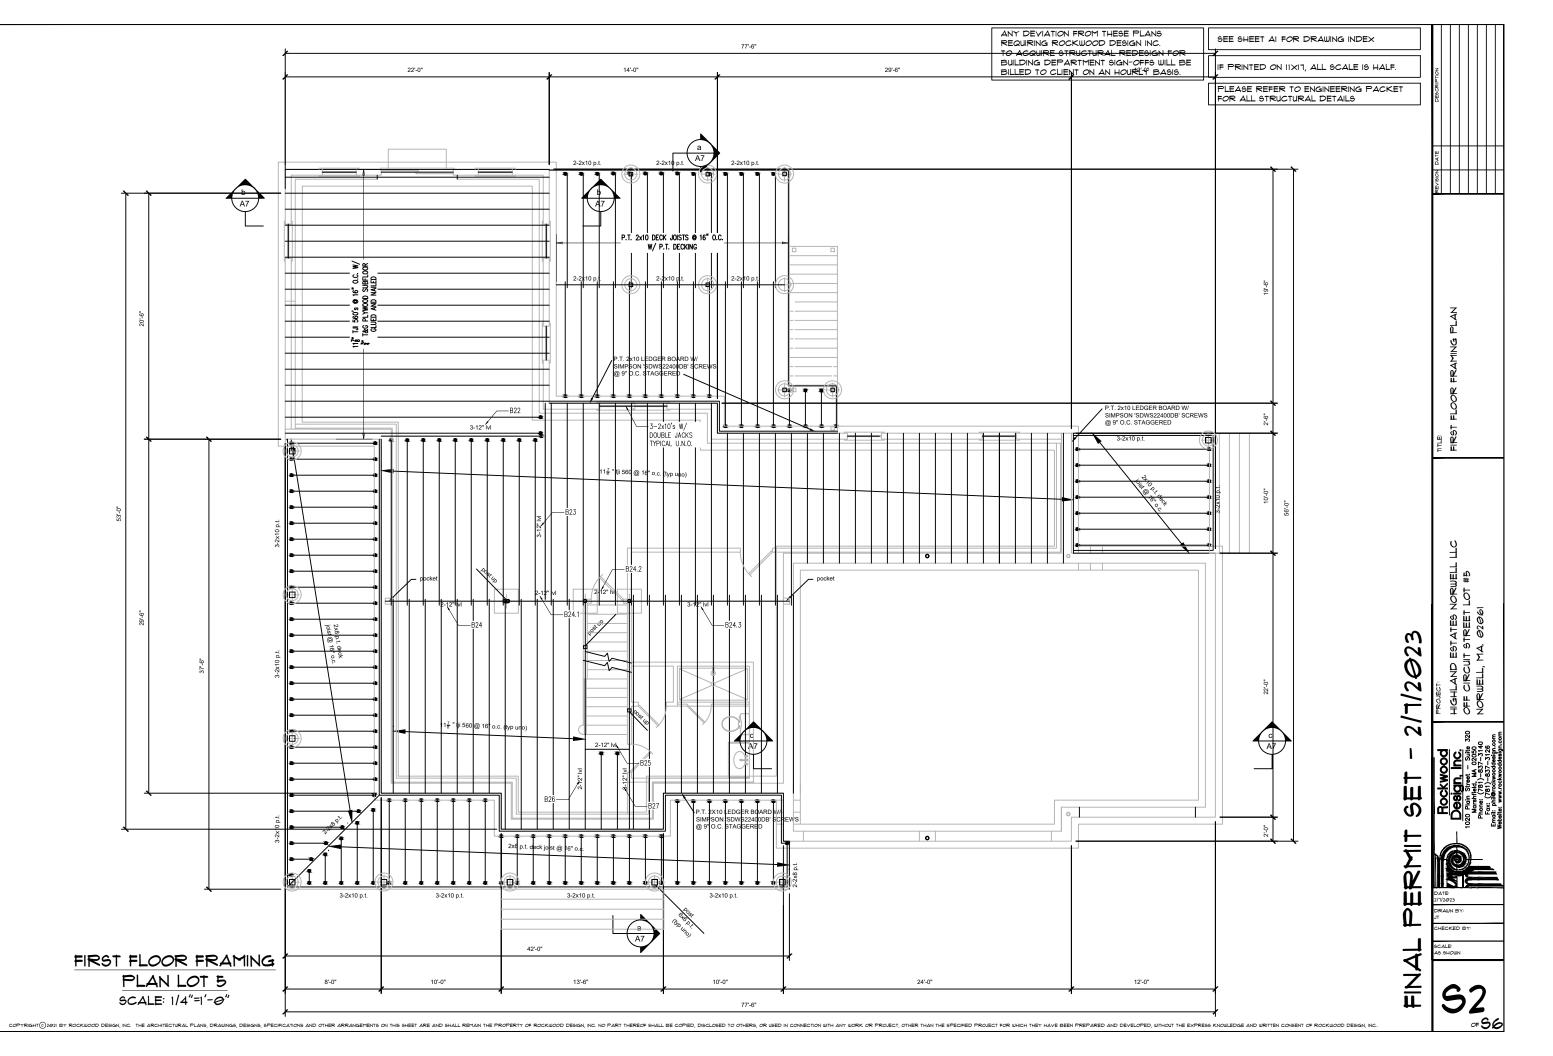

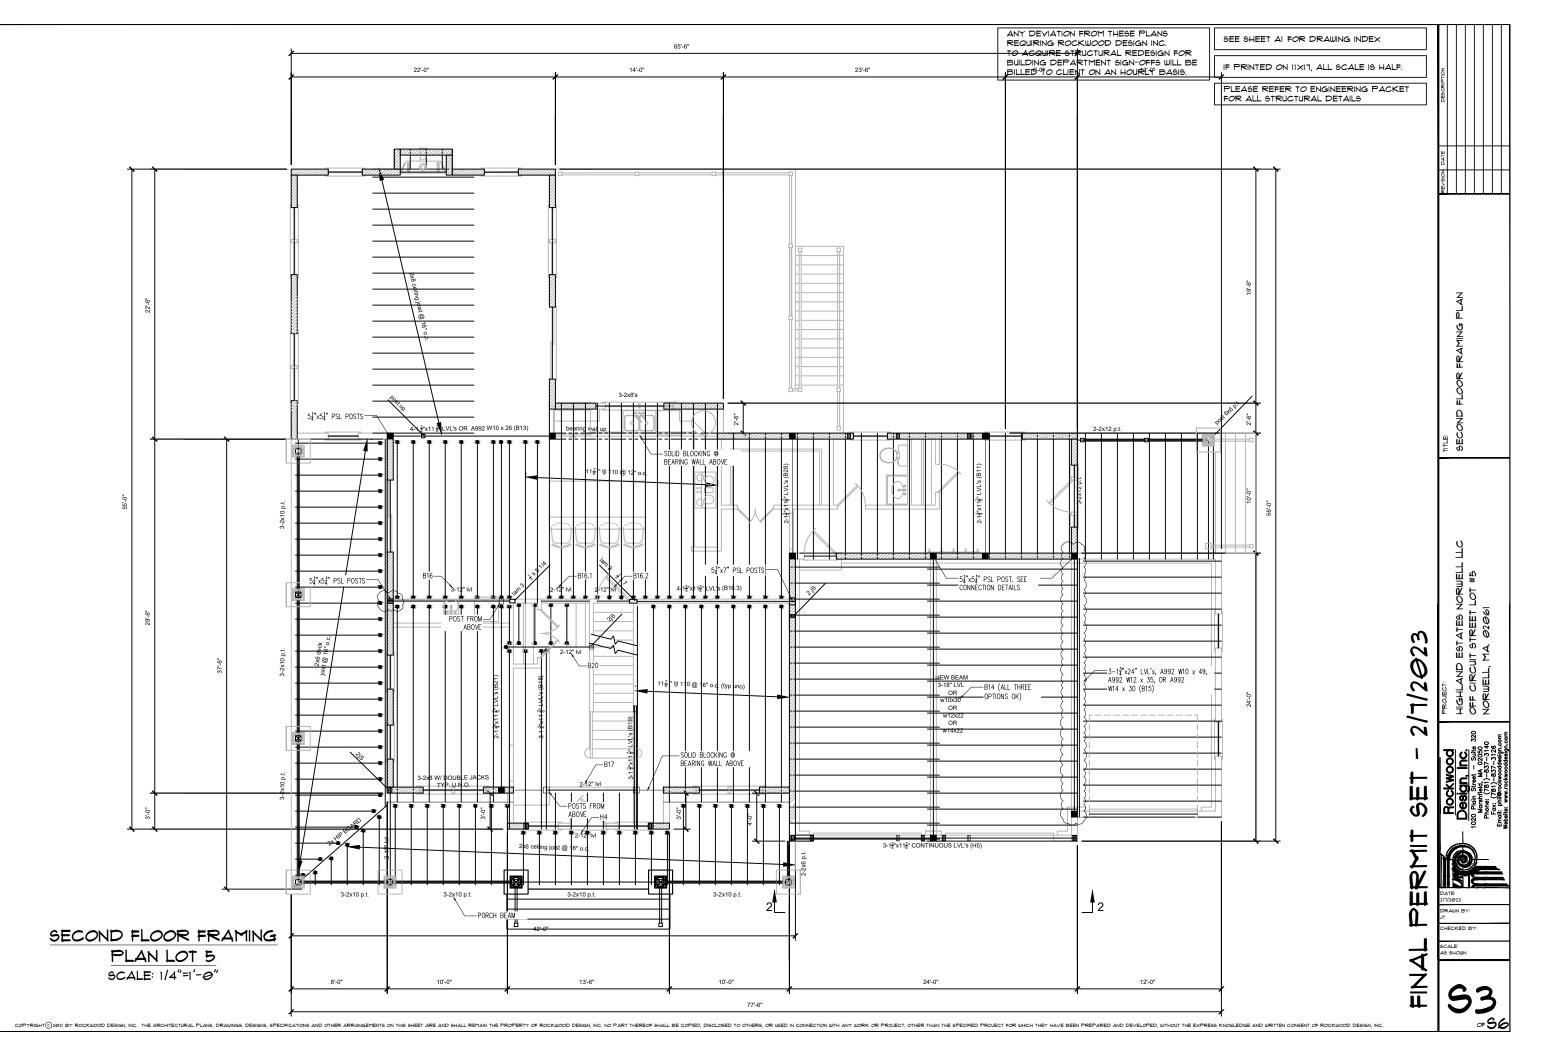


ANY DEVIATION FROM THE REQUIRING ROCKWOOD DE TO ACQUIRE STRUCTURAL BUILDING DEPARTMENT SIC BILLED TO CLIENT ON AN H

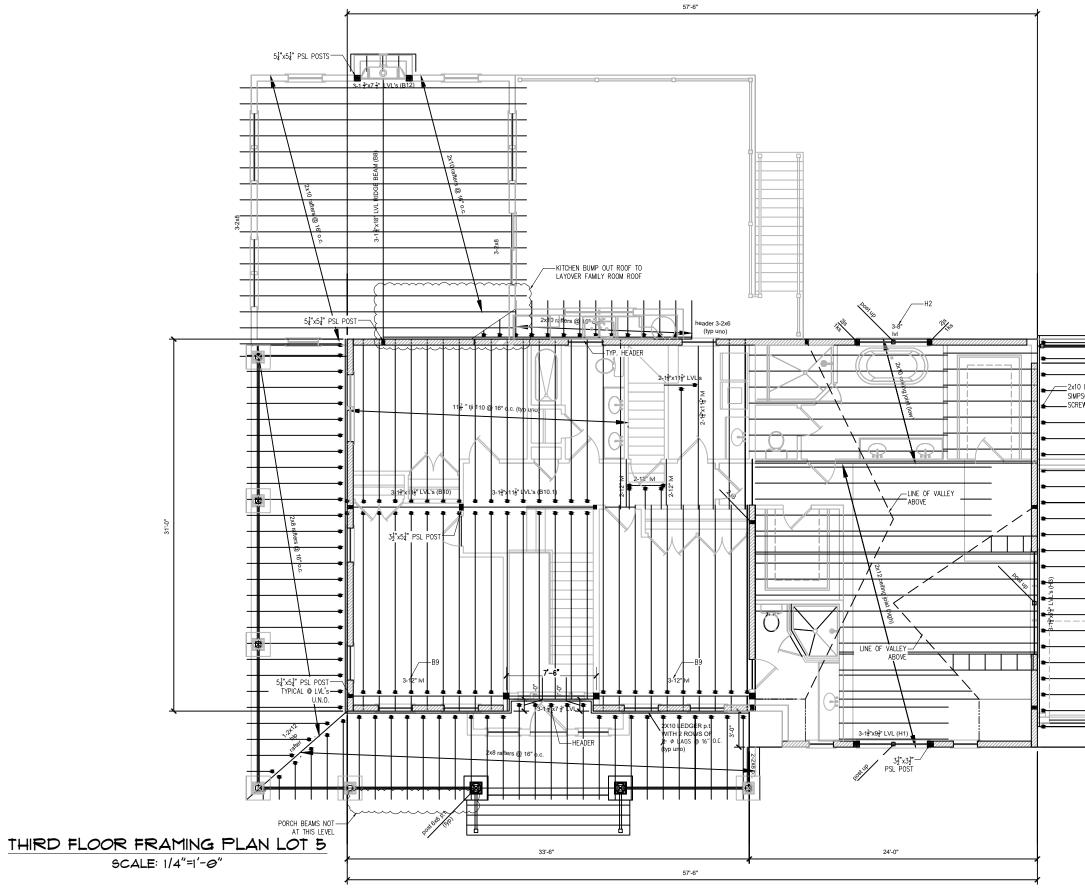


0 LEDCER BDARD W/ PSON 'SDWS22400DB' ZEWS @ EAC+1 STUD			TITE REVISION DATE	
248 RAFTERS © 16" O.C. W/ 248 RAFTERS © 16" O.C		FINAL PERMIT SET - 2/7/2023		A Contraction of the sector of

S4 *∝*56

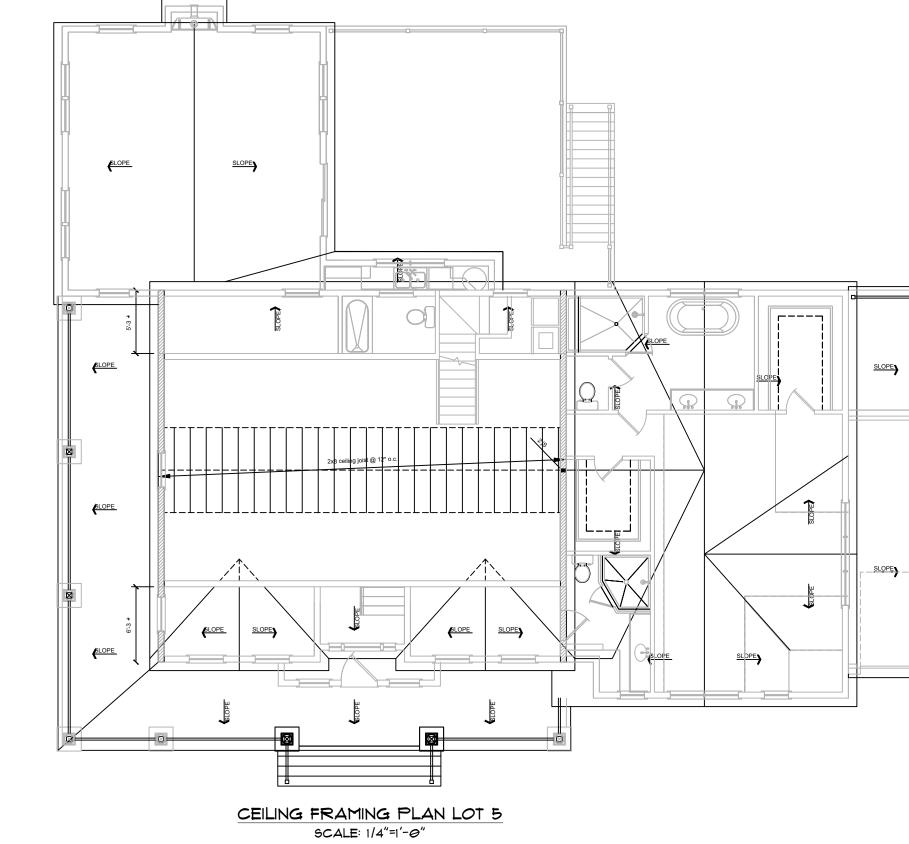

ESE PLANS DESIGN INC. L REDESIGN FOR SIGN-OFFS WILL BE HOURLY BASIS. PLEASE REFER TO ENGINEERING PACK FOR ALL STRUCTURAL DETAILS		REVISION DATE DESCRIPTION
		TILE CEILING FRAMING PLAN
≝€	7/2 <i>0</i> 23	PROJECT: HIGHLAND E9TATES NORWELL LLC OFF CIRCUIT STREET LOT #5 NORWELL, MA. 02061
ND DEVELOPED, WITHOUT THE EXPRESS KNOWLEDGE AND WRITTEN CONSENT OF ROCKWOOD DESIGN, INC.	FINAL PERMIT SET - 2/1/2023	BOCKWOOD BOCKWO

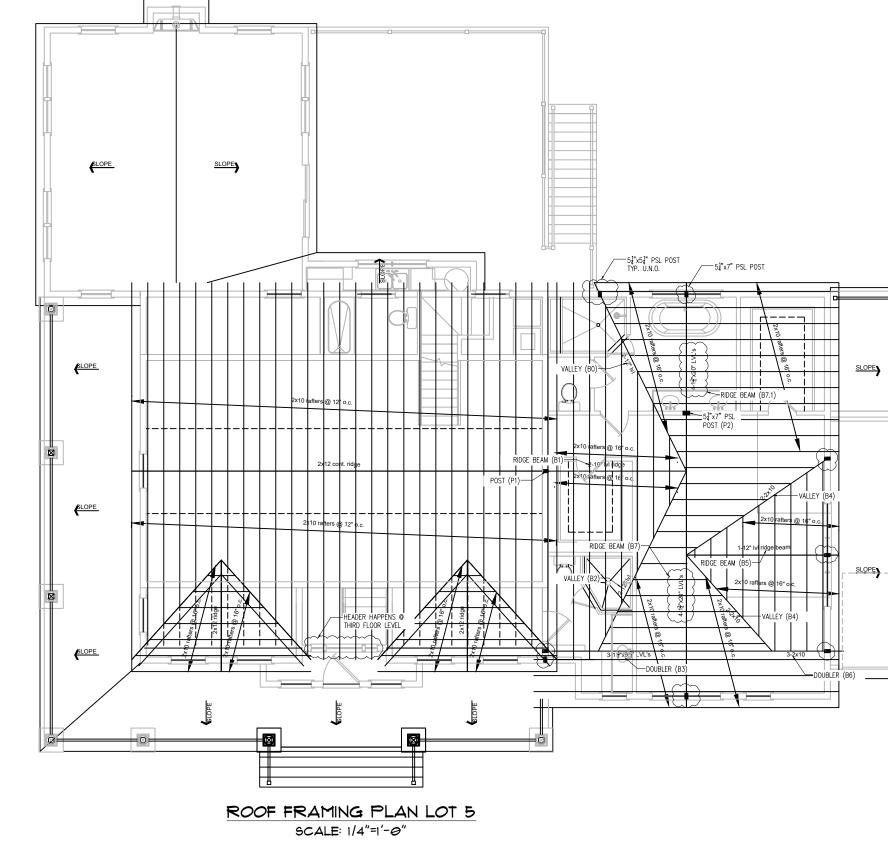

IESE PLANS DESIGN INC. L REDESIGN FOR BIGN-OFFS WILL BE HOURLY BASIS.	SEE SHEET AI FOR DRAWING INDEX IF PRINTED ON 11X17, ALL SCALE IS HALF. PLEASE REFER TO ENGINEERING PACKET FOR ALL STRUCTURAL DETAILS		REVISION DATE DESCRIPTION
0			TILE ROOF FRAMING PLAN
۳ ۳		- 21 112/023	FROJECT: HIGHLAND E9TATE9 NORWELL LLC OFF CIRCUIT 9TREET LOT #5 NORWELL, MA. 02061
ND DEVELOPED, WITHOUT THE EXPRES	e KNOWLEDGIE AND WRITTEN CONSENT OF ROCKWOOD DENGN, INC.		BOCKWOOD BOCKWO